

Stanyl® HGR2 BK00001 (PA46+PTFE)

Heat Stabilized, Wear and Friction Modified

Print Date: 2021-09-16

Stanyl® HGR2 is a friction-modified high heat polyamide designed for friction-reduction in valve timing-chain systems that offers excellent wear & friction properties in combination with low friction.

Properties	Typical Data	Unit	Test Method
Rheological properties	dry / cond		
Molding shrinkage [parallel]	2 / *	%	Sim. to ISO 294-4
Molding shrinkage [normal]	2 / *	%	Sim. to ISO 294-4
Mechanical properties	dry / cond		
Tensile modulus	3100 / 900	MPa	ISO 527-1/-2
Tensile modulus (120°C)	770 / -	MPa	ISO 527-1/-2
Tensile modulus (160°C)	650	MPa	ISO 527-1/-2
Tensile modulus (180°C)	600	MPa	ISO 527-1/-2
Tensile modulus (200°C)	560	MPa	ISO 527-1/-2
Yield stress	90 / 50	MPa	ISO 527-1/-2
Yield stress (120°C)	45	MPa	ISO 527-1/-2
Yield stress (160°C)	40	MPa	ISO 527-1/-2
Yield stress (180°C)	35	MPa	ISO 527-1/-2
Yield stress (200°C)	30	MPa	ISO 527-1/-2
Nominal strain at break (120°C)	>50	%	ISO 527-1/-2
Nominal strain at break (160°C)	>50	%	ISO 527-1/-2
Nominal strain at break (180°C)	>50	%	ISO 527-1/-2
Nominal strain at break (200°C)	>50	%	ISO 527-1/-2
Stress at break	85 / 55	MPa	ISO 527-1/-2
Strain at break	25 / >50	%	ISO 527-1/-2
Flexural modulus	2900 / -	MPa	ISO 178

Akulon®, Arnite®, Arnitel®, EcoPaXX®, ForTii®, Novamid®, Stanyl® and Xytron™ are trademarks of DSM.

All information supplied by or on behalf of DSM in relation to its products, whether in the nature of data, recommendations or otherwise, is supported by research and, in good faith, believed reliable, but DSM assumes no liability and makes no warranties of any kind, express or implied, including, but not limited to, those of title, merchantability, fitness for a particular purpose or non-infringement or any warranty arising from a course of dealing, usage, or trade practice whatsoever in respect of application, processing or use made of the aforementioned information, or product. The user assumes all responsibility for the use of all information provided and shall verify quality and other properties or any consequences from the use of all such information.

Typical values are indicative only and are not to be construed as being binding specifications. Colorants in the product or other additives may cause significant variations in typical values. This document replaces all previous versions relating to this subject.

Copyright © DSM 2021. All rights reserved. No part of the information may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of DSM.



DSM

BRIGHT SCIENCE. BRIGHTER LIVING.

Property Data

Stanyl[®] HGR2 BK00001

Print Date: 2021-09-16

Properties	Typical Data	Unit	Test Method
Flexural strength	120 / -	MPa	ISO 178
Charpy impact strength (+23°C)	N / N	kJ/m ²	ISO 179/1eU
Charpy impact strength (-30°C)	150 / N	kJ/m ²	ISO 179/1eU
Charpy notched impact strength (+23°C)	9 / 15	kJ/m ²	ISO 179/1eA
Charpy notched impact strength (-30°C)	6 / 6	kJ/m ²	ISO 179/1eA
Izod notched impact strength (+23°C)	8.5 / -	kJ/m ²	ISO 180/1A

Thermal properties

dry / cond

Melting temperature (10°C/min)	295 / *	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	190 / *	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	290 / *	°C	ISO 75-1/-2
Coeff. of linear therm. expansion (parallel)	0.85 / *	E-4/°C	ISO 11359-1/-2
Coeff. of linear therm. expansion (normal)	1.1 / *	E-4/°C	ISO 11359-1/-2
Thermal Index 5000 hrs	152	°C	IEC 60216/ISO 527-1/-2

Other properties

dry / cond

Humidity absorption	3.2 / *	%	Sim. to ISO 62
Density	1260 / -	kg/m ³	ISO 1183

Akulon®, Arnite®, Arnitel®, EcoPaXX®, ForTii®, Novamid®, Stanyl® and Xytron™ are trademarks of DSM.

All information supplied by or on behalf of DSM in relation to its products, whether in the nature of data, recommendations or otherwise, is supported by research and, in good faith, believed reliable, but DSM assumes no liability and makes no warranties of any kind, express or implied, including, but not limited to, those of title, merchantability, fitness for a particular purpose or non-infringement or any warranty arising from a course of dealing, usage, or trade practice whatsoever in respect of application, processing or use made of the aforementioned information, or product. The user assumes all responsibility for the use of all information provided and shall verify quality and other properties or any consequences from the use of all such information.

Typical values are indicative only and are not to be construed as being binding specifications. Colorants in the product or other additives may cause significant variations in typical values. This document replaces all previous versions relating to this subject.

Copyright © DSM 2021. All rights reserved. No part of the information may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of DSM.




DSM

BRIGHT SCIENCE. BRIGHTER LIVING.

Stanyl® HGR2 BK00001

Print Date: 2021-09-16

Tens. fatigue 8Hz, T, R=0.1 ,
dry

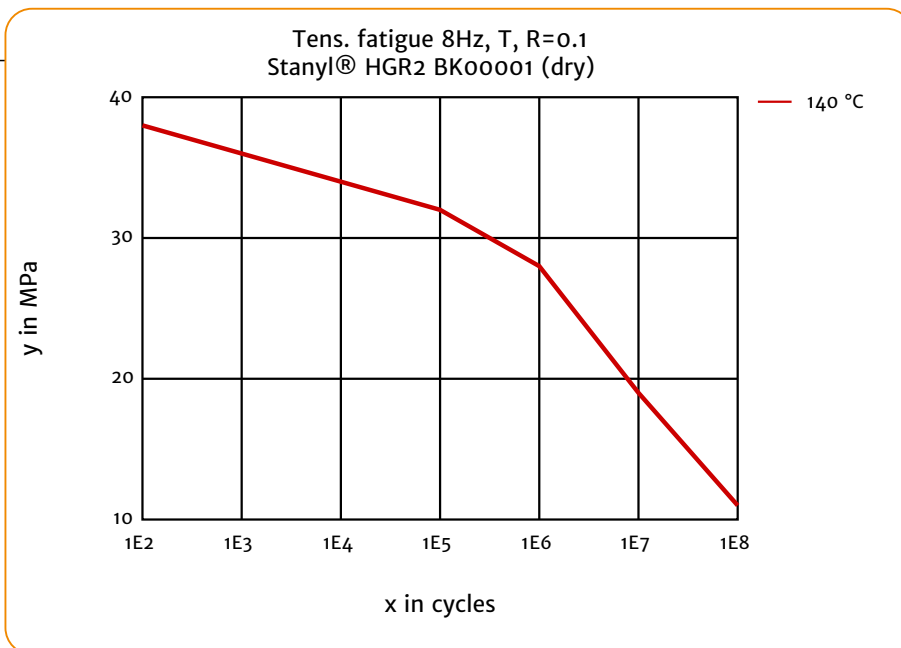

Akulon®, Arnite®, Arnitel®, EcoPaXX®, ForTii®, Novamid®, Stanyl® and Xytron™ are trademarks of DSM.

All information supplied by or on behalf of DSM in relation to its products, whether in the nature of data, recommendations or otherwise, is supported by research and, in good faith, believed reliable, but DSM assumes no liability and makes no warranties of any kind, express or implied, including, but not limited to, those of title, merchantability, fitness for a particular purpose or non-infringement or any warranty arising from a course of dealing, usage, or trade practice whatsoever in respect of application, processing or use made of the aforementioned information, or product. The user assumes all responsibility for the use of all information provided and shall verify quality and other properties or any consequences from the use of all such information.

Typical values are indicative only and are not to be construed as being binding specifications. Colorants in the product or other additives may cause significant variations in typical values. This document replaces all previous versions relating to this subject.

Copyright © DSM 2021. All rights reserved. No part of the information may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of DSM.