



Amodel® AS-1133 HS

polyphthalamide

Amodel® AS-1133 HS is a 33% glass reinforced, heat stabilized polyphthalamide (PPA) resin that provides excellent structural integrity in molded parts, even those with wall thicknesses greater than 0.125 in (3 mm).

Key properties of this structural resin are high heat deflection temperature, high flexural modulus, high tensile

strength, excellent creep resistance and low moisture absorption.

- Black: AS-1133 HS BK 324
- Natural: AS-1133 HS NT

General

Material Status	<ul style="list-style-type: none"> • Commercial: Active 	
Availability	<ul style="list-style-type: none"> • Africa & Middle East • Asia Pacific • Europe 	<ul style="list-style-type: none"> • Latin America • North America
Filler / Reinforcement	<ul style="list-style-type: none"> • Glass Fiber, 33% Filler by Weight 	
Additive	<ul style="list-style-type: none"> • Heat Stabilizer 	
Features	<ul style="list-style-type: none"> • Chemical Resistant • Creep Resistant • Good Dimensional Stability • Good Stiffness 	<ul style="list-style-type: none"> • Heat Stabilized • High Heat Resistance • High Strength • Low Moisture Absorption
Uses	<ul style="list-style-type: none"> • Automotive Applications • Automotive Electronics • Automotive Under the Hood • Connectors • Fuel Lines • General Purpose • Housings • Industrial Applications 	<ul style="list-style-type: none"> • Industrial Parts • Lawn and Garden Equipment • Machine/Mechanical Parts • Metal Replacement • Oil/Gas Applications • Power/Other Tools • Thick-walled Parts • Valves/Valve Parts
RoHS Compliance	<ul style="list-style-type: none"> • RoHS Compliant 	

Amodel® AS-1133 HS

polyphthalamide

General

Automotive Specifications	<ul style="list-style-type: none"> • ASTM D4000 PA121 G35 Color: BK324 Black • ASTM D4000 PA121 G35 Color: NT Natural • ASTM D4000 PPA0111 G33 GB145 KD200 KN090 PN080 YI265 Color: BK324 Black • ASTM D4000 PPA0111 G33 GB145 KD200 KN090 PN080 YI265 Color: NT Natural • ASTM D6779 PA121G35 • BOSCH N28 BN05-OX1 BN0510-GF35-3Anf01SO Color: NT Natural • BOSCH N28 BN05-OX1 BN0510-GF35-3Asw01SO Color: BK324 Black • DELPHI M-6071 Color: NT Natural • FORD WSK-M4D843-A2 Color: BK324 Black • FORD WSK-M4D843-A2 Color: NT Natural • FORD WSK-M4D861-A2 • FORD WSP-M4D843-A • ISO 1874 PA6T/6I/66, MH, 12-120, GF33 Color: BK324 Black • ISO 1874 PA6T/6I/66, MH, 12-120, GF33 Color: NT Natural • SIEMENS S219536 Color: NT Natural
Appearance	<ul style="list-style-type: none"> • Black • Natural Color
Forms	<ul style="list-style-type: none"> • Pellets
Processing Method	<ul style="list-style-type: none"> • Injection Molding

Physical	Dry	Conditioned	Unit	Test method
Density	1.44	--	g/cm ³	ISO 1183/B
Molding Shrinkage				ASTM D955
Flow	0.40	0.0	%	
Across Flow	0.80	0.20	%	
Water Absorption (24 hr)	0.21	--	%	ASTM D570

Mechanical	Dry	Conditioned	Unit	Test method
Tensile Modulus				
--	13100	13100	MPa	ASTM D638
--	12200	--	MPa	ISO 527-1
Tensile Stress				
Yield	225	--	MPa	ISO 527-2
Break	221	193	MPa	ASTM D638
Tensile Elongation				
Break	2.5	2.1	%	ASTM D638
Break	3.0	--	%	ISO 527-2
Flexural Modulus				
--	10300	10300	MPa	ASTM D790
--	10300	--	MPa	ISO 178
Flexural Stress				
--	326	--	MPa	ISO 178
Yield	317	254	MPa	ASTM D790
Compressive Strength	276	247	MPa	ASTM D695
Shear Strength	101	88.9	MPa	ASTM D732
Poisson's Ratio	0.41	--		ASTM E132

Amodel® AS-1133 HS

polyphthalamide

Impact	Dry	Conditioned	Unit	Test method
Charpy Notched Impact Strength	11	--	kJ/m ²	ISO 179/1eA
Charpy Unnotched Impact Strength	82	--	kJ/m ²	ISO 179/1eU
Notched Izod Impact				
--	85	75	J/m	ASTM D256
--	11	--	kJ/m ²	ISO 180/1A
Unnotched Izod Impact	1000	--	J/m	ASTM D4812
Hardness	Dry	Conditioned	Unit	Test method
Rockwell Hardness (R-Scale)	125	--		ASTM D785
Thermal	Dry	Conditioned	Unit	Test method
Deflection Temperature Under Load				
0.45 MPa, Annealed, 3.18 mm	297	--	°C	ASTM D648
1.8 MPa, Annealed, 3.18 mm	285	--	°C	ASTM D648
1.8 MPa, Annealed	277	--	°C	ISO 75-2/ Af
Continuous Use Temperature				ASTM D3045
-- ¹	164	--	°C	
-- ²	185	--	°C	
Melting Temperature	310	--	°C	ISO 11357-3 ASTM D3418
CLTE				ASTM E831
Flow : 0 to 100°C	2.3E-5	--	cm/cm/°C	
Flow : 160 to 249°C	1.4E-5	--	cm/cm/°C	
Transverse : 0 to 100°C	5.9E-5	--	cm/cm/°C	
Transverse : 160 to 249°C	1.3E-4	--	cm/cm/°C	
Electrical	Dry	Conditioned	Unit	Test method
Volume Resistivity	1.0E+16	2.0E+15	ohms·cm	ASTM D257
Dielectric Strength (3.18 mm)	21	21	kV/mm	ASTM D149
Dielectric Constant				ASTM D150
60 Hz	4.40	4.70		
1 MHz	4.20	4.30		
Dissipation Factor				ASTM D150
60 Hz	5.0E-3	9.0E-3		
1 MHz	0.017	0.022		
Arc Resistance	140	120	sec	ASTM D495
Comparative Tracking Index (CTI)	550	550	V	UL 746A
Flammability	Dry	Conditioned	Unit	Test method
Flame Rating ³ (3.2 mm)	HB	--		UL 94

Amodel® AS-1133 HS

polyphthalamide

Optical	Dry	Conditioned	Unit	Test method
Transmittance ⁴				ASTM D1003
1070 nm : 1.60 mm	> 35	--	%	
940 nm : 1.60 mm	> 30	--	%	

Injection	Dry	Unit
Drying Temperature	120	°C
Drying Time	4.0	hr
Suggested Max Moisture	0.030 to 0.060	%
Hopper Temperature	79	°C
Rear Temperature	304 to 318	°C
Front Temperature	316 to 329	°C
Processing (Melt) Temp	321 to 343	°C
Mold Temperature	135	°C


Amodel® AS-1133 HS

polyphthalamide


Injection Notes

Storage:

- Amodel® compounds are shipped in moisture-resistant packages at moisture levels according to specifications. Sealed, undamaged bags should be preferably stored in a dry room at a maximum temperature of 50°C (122°F) and should be protected from possible damage. If only a portion of a package is used, the remaining material should be transferred into a sealable container. It is recommended that Amodel® resins be dried prior to molding following the recommendations found in this datasheet and/or in the Amodel® processing guide.
-

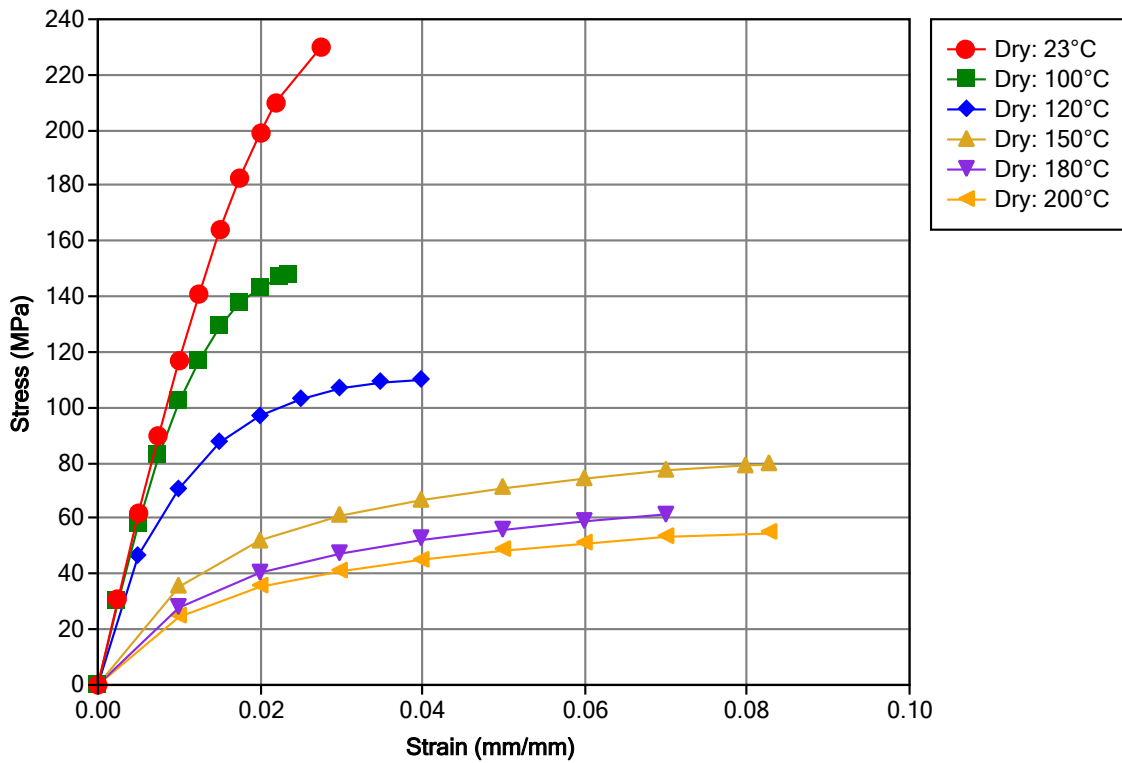


Secant Modulus vs. Strain (ISO 11403-1)

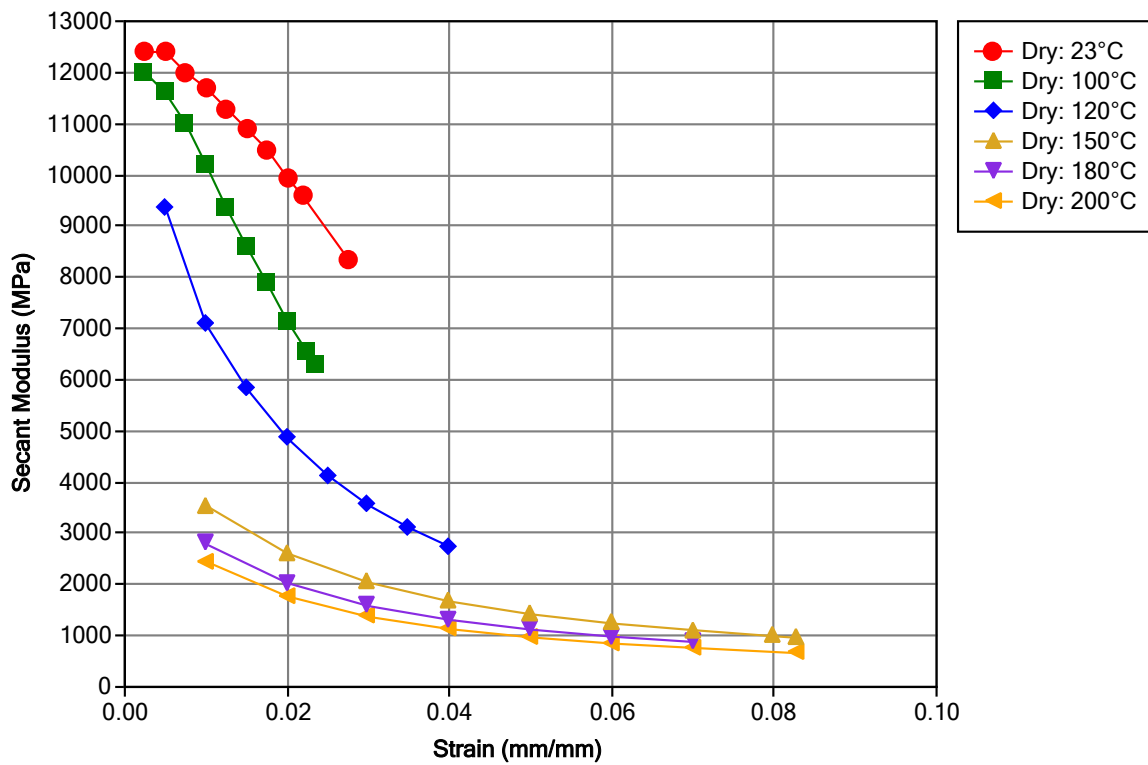

Amodel® AS-1133 HS

polyphthalamide

Viscosity vs. Shear Rate (ISO 11403-2)

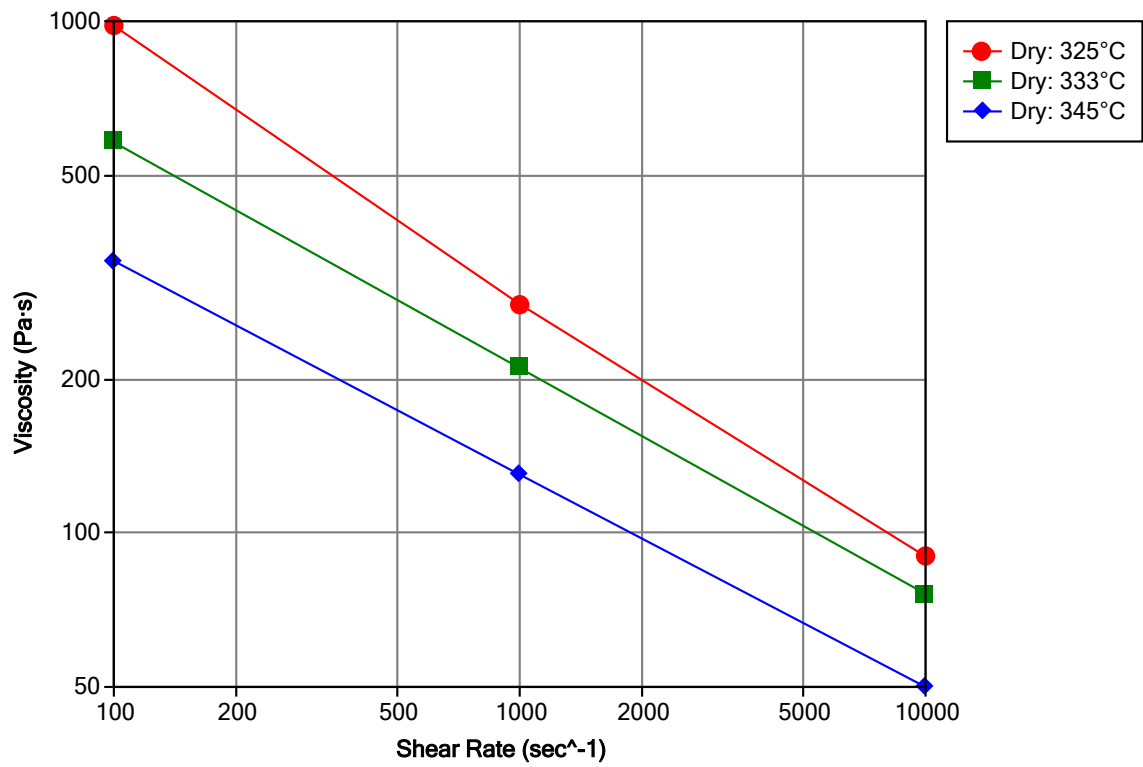

Amodel® AS-1133 HS

polyphthalamide

Notes

Typical properties: these are not to be construed as specifications.

¹ 20000 hr

² 5000 hr

³ These flammability ratings are not intended to reflect hazards presented by these or any other materials under actual fire conditions.

⁴ Transmittance for natural grade



Progress beyond

www.solvay.com

SpecialtyPolymers.EMEA@solvay.com | Europe, Middle East and Africa

SpecialtyPolymers.Americas@solvay.com | Americas

SpecialtyPolymers.Asia@solvay.com | Asia and Australia

Safety Data Sheets (SDS) are available by emailing us or contacting your sales representative. Always consult the appropriate SDS before using any of our products.

Neither Solvay Specialty Polymers nor any of its affiliates makes any warranty, express or implied, including merchantability or fitness for use, or accepts any liability in connection with this product, related information or its use. Some applications of which Solvay's products may be proposed to be used are regulated or restricted by applicable laws and regulations or by national or international standards and in some cases by Solvay's recommendation, including applications of food/feed, water treatment, medical, pharmaceuticals, and personal care. Only products designated as part of the Solviva® family of biomaterials may be considered as candidates for use in implantable medical devices. The user alone must finally determine suitability of any information or products for any contemplated use in compliance with applicable law, the manner of use and whether any patents are infringed. The information and the products are for use by technically skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other substance or any other process. This is not a license under any patent or other proprietary right.

All trademarks and registered trademarks are property of the companies that comprise the Solvay Group or their respective owners.

© 2021 Solvay Specialty Polymers. All rights reserved.