



CYCOLAC™ Resin S157

Europe-Africa-Middle East: OBSOLETE

CYCOLAC S157 is a high flow flame retardant ABS with good processability developed for applications requiring UL94 V0 at reduced wall thickness. Available in 3 colors: 10000, 225299 and 40555.

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
MECHANICAL			
Taber Abrasion, CS-17, 1 kg	145	mg/1000cy	SABIC Method
Tensile Stress, yield, 5 mm/min	40	MPa	ISO 527
Tensile Stress, break, 5 mm/min	35	MPa	ISO 527
Tensile Stress, yield, 50 mm/min	45	MPa	ISO 527
Tensile Stress, break, 50 mm/min	35	MPa	ISO 527
Tensile Strain, yield, 5 mm/min	2	%	ISO 527
Tensile Strain, break, 5 mm/min	10	%	ISO 527
Tensile Strain, yield, 50 mm/min	2	%	ISO 527
Tensile Strain, break, 50 mm/min	10	%	ISO 527
Tensile Modulus, 1 mm/min	2700	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	70	MPa	ISO 178
Flexural Modulus, 2 mm/min	2500	MPa	ISO 178
Hardness, H358/30	100	MPa	ISO 2039-1
Hardness, Rockwell R	112	-	ISO 2039-2
IMPACT			
Izod Impact, unnotched 80*10*4 +23°C	NB	kJ/m ²	ISO 180/1U
Izod Impact, unnotched 80*10*4 -30°C	55	kJ/m ²	ISO 180/1U
Izod Impact, notched 80*10*4 +23°C	9	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*4 -30°C	4	kJ/m ²	ISO 180/1A
Charpy 23°C, V-notch Edgew 80*10*4 sp=62mm	8	kJ/m ²	ISO 179/1eA
Charpy -30°C, V-notch Edgew 80*10*4 sp=62mm	3	kJ/m ²	ISO 179/1eA
THERMAL			
Thermal Conductivity	0.2	W/m-°C	ISO 8302

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

(6) Needs hard coat to consistently pass 60 sec Vertical Burn.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA

DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES (SELLER) ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER'S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT.

Each user is responsible for making its own determination as to the suitability of Seller's materials, products, services or recommendations for the user's particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC and brands marked with ™ are trademarks of SABIC or its subsidiaries or affiliates.

© 2016 Saudi Basic Industries Corporation (SABIC).



CYCOLAC™ Resin S157

Europe-Africa-Middle East: OBSOLETE

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
THERMAL			
CTE, 23°C to 60°C, flow	8.E-05	1/°C	ISO 11359-2
CTE, 23°C to 60°C, xflow	8.E-05	1/°C	ISO 11359-2
Ball Pressure Test, 75°C +/- 2°C	PASSES	-	IEC 60695-10-2
Ball Pressure Test, approximate maximum	80	°C	IEC 60695-10-2
Vicat Softening Temp, Rate B/50	84	°C	ISO 306
Vicat Softening Temp, Rate B/120	86	°C	ISO 306
HDT/Be, 0.45MPa Edgew 120*10*4 sp=100mm	81	°C	ISO 75/Be
HDT/Ae, 1.8 MPa Edgew 120*10*4 sp=100mm	74	°C	ISO 75/Ae
Relative Temp Index, Elec	60	°C	UL 746B
Relative Temp Index, Mech w/impact	60	°C	UL 746B
Relative Temp Index, Mech w/o impact	60	°C	UL 746B
PHYSICAL			
Mold Shrinkage on Tensile Bar, flow (2) (5)	0.4 - 0.7	%	SABIC Method
Density	1.18	g/cm ³	ISO 1183
Water Absorption, (23°C/sat)	1	%	ISO 62
Moisture Absorption (23°C / 50% RH)	0.2	%	ISO 62
Melt Flow Rate, 220°C/5.0 kg	17	g/10 min	ISO 1133
Melt Flow Rate, 220°C/10.0 kg	78	g/10 min	ISO 1133
Melt Volume Rate, MVR at 220°C/5.0 kg	16	cm ³ /10 min	ISO 1133
Melt Volume Rate, MVR at 220°C/10.0 kg	72	cm ³ /10 min	ISO 1133
ELECTRICAL			
Volume Resistivity	>1.E+15	Ohm-cm	IEC 60093
Surface Resistivity, ROA	>1.E+15	Ohm	IEC 60093
Dielectric Strength, in oil, 0.8 mm	35	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 1.6 mm	26	kV/mm	IEC 60243-1

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

(6) Needs hard coat to consistently pass 60 sec Vertical Burn.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA

DISCLAIMER : THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES (SELLER) ARE SOLD SUBJECT TO SELLER S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT.

Each user is responsible for making its own determination as to the suitability of Seller s materials, products, services or recommendations for the user s particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller s Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC and brands marked with ™ are trademarks of SABIC or its subsidiaries or affiliates.

©2016Saudi Basic Industries Corporation (SABIC).



CYCOLAC™ Resin S157

Europe-Africa-Middle East: OBSOLETE

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
ELECTRICAL			
Dielectric Strength, in oil, 3.2 mm	18	kV/mm	IEC 60243-1
Relative Permittivity, 1 MHz	2.7	-	IEC 60250
Dissipation Factor, 50/60 Hz	0.005	-	IEC 60250
Dissipation Factor, 1 MHz	0.01	-	IEC 60250
Comparative Tracking Index	450	V	IEC 60112
Relative Permittivity, 50/60 Hz	2.8	-	IEC 60250
FLAME CHARACTERISTICS			
UL Recognized, 94V-0 Flame Class Rating (3)	1.5	mm	UL 94
UL Recognized, 94-5VA Rating (3)	3	mm	UL 94
UL Recognized, 94-5VB Rating (3)	2.5	mm	UL 94
Glow Wire Flammability Index 960°C, passes at	1	mm	IEC 60695-2-12
Oxygen Index (LOI)	28	%	ISO 4589

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

(6) Needs hard coat to consistently pass 60 sec Vertical Burn.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA

DISCLAIMER : THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES (SELLER) ARE SOLD SUBJECT TO SELLER S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT.

Each user is responsible for making its own determination as to the suitability of Seller s materials, products, services or recommendations for the user s particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller s Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC and brands marked with ™ are trademarks of SABIC or its subsidiaries or affiliates.

©2016Saudi Basic Industries Corporation (SABIC).



CYCOLAC™ Resin S157

Europe-Africa-Middle East: OBSOLETE

PROCESSING PARAMETERS	TYPICAL VALUE	Unit
Injection Molding		
Drying Temperature	80 - 85	°C
Drying Time	2 - 4	hrs
Maximum Moisture Content	0.1	%
Melt Temperature	180 - 210	°C
Nozzle Temperature	180 - 200	°C
Front - Zone 3 Temperature	185 - 205	°C
Middle - Zone 2 Temperature	185 - 205	°C
Rear - Zone 1 Temperature	170 - 190	°C
Hopper Temperature	60 - 80	°C
Mold Temperature	40 - 80	°C

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

(6) Needs hard coat to consistently pass 60 sec Vertical Burn.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA

DISCLAIMER : THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES (SELLER) ARE SOLD SUBJECT TO SELLER S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT.


Each user is responsible for making its own determination as to the suitability of Seller s materials, products, services or recommendations for the user s particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller s Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC and brands marked with ™ are trademarks of SABIC or its subsidiaries or affiliates.

©2016Saudi Basic Industries Corporation (SABIC).

CYCOLAC™ Resin S157
Europe-Africa-Middle East: OBSOLETE

CALCULATED FLOW LENGTH INDICATION
Moldflow® Radial Flow Analysis
CYCOLAC® S157
Melt Temperature : 220°C
Mold Temperature : 60°C

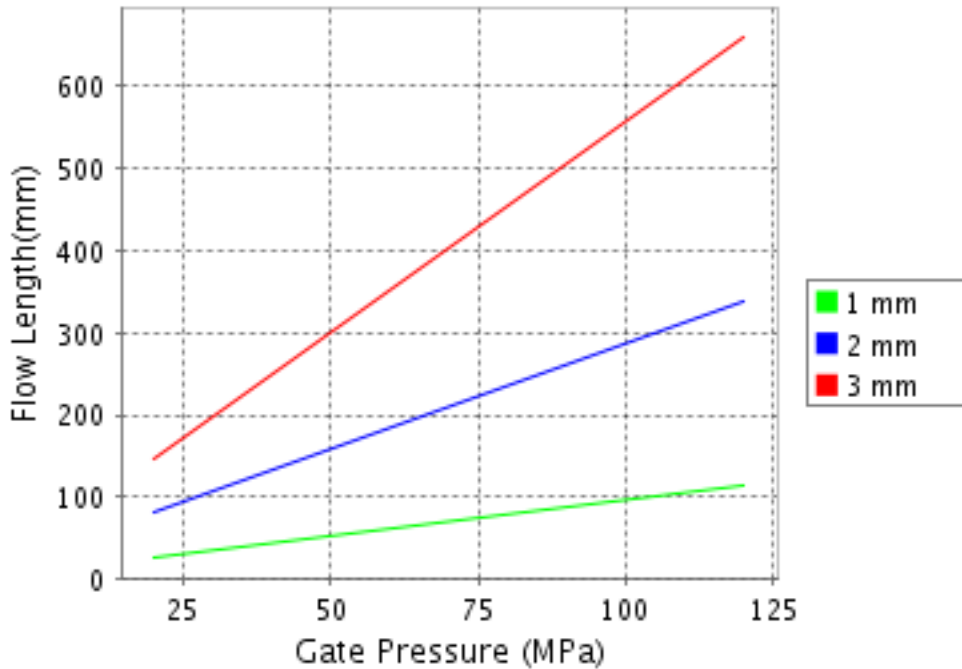

Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.
® Moldflow is a registered trademark of the Moldflow Corporation.

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

(6) Needs hard coat to consistently pass 60 sec Vertical Burn.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA

DISCLAIMER : THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES (SELLER) ARE SOLD SUBJECT TO SELLER S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT.

Each user is responsible for making its own determination as to the suitability of Seller s materials, products, services or recommendations for the user s particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller s Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC and brands marked with ™ are trademarks of SABIC or its subsidiaries or affiliates.

©2016Saudi Basic Industries Corporation (SABIC).