

# Polyflam RABS 90000 UV5

Acrylonitrile Butadiene Styrene  
LyondellBasell Industries  
Engineering Plastics

## Product Description

Flame retardant ABS standard grade without PBDE and higher thermal stability

## General

Material Status	• Commercial: Active		
Availability	• Africa & Middle East	• Asia Pacific	• Europe
Features	• Flame Retardant • Good Processability	• Good Thermal Stability • Non-Blooming	
UL File Number	• E86615		
Processing Method	• Injection Molding		
Part Marking Code (ISO 11469)	• ABS FR17		
Resin ID (ISO 1043)	• ABS FR17		

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.20 g/cm <sup>3</sup>	1.20 g/cm <sup>3</sup>	ISO 1183/A
Melt Volume-Flow Rate (MVR) (220°C/10.0 Kg)	30 cm <sup>3</sup> /10min	30 cm <sup>3</sup> /10min	ISO 1133
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus	319000 psi	2200 MPa	ISO 527-1/1A/1
Tensile Stress (Yield)	5800 psi	40.0 MPa	ISO 527-2/1A/50
Tensile Strain (Yield)	3.0 %	3.0 %	ISO 527-2/1A/50
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Notched Impact Strength			ISO 179/1eA
-22°F (-30°C)	2.4 ft·lb/in <sup>2</sup>	5.0 kJ/m <sup>2</sup>	
73°F (23°C)	4.8 ft·lb/in <sup>2</sup>	10 kJ/m <sup>2</sup>	
Charpy Unnotched Impact Strength			ISO 179/1eU
-22°F (-30°C)	21 ft·lb/in <sup>2</sup>	45 kJ/m <sup>2</sup>	
73°F (23°C)	38 ft·lb/in <sup>2</sup>	80 kJ/m <sup>2</sup>	
Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Ball Indentation Hardness	16400 psi	113 MPa	ISO 2039-1
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			
66 Psi (0.45 Mpa), Unannealed	198 °F	92.0 °C	ISO 75-2/Bf
264 Psi (1.8 Mpa), Unannealed	176 °F	80.0 °C	ISO 75-2/Af
Vicat Softening Temperature			
--	205 °F	96.0 °C	ISO 306/B50
--	221 °F	105 °C	ISO 306/A50
Ball Pressure Test (194°F (90°C))	Pass	Pass	IEC 60695-10-2
RTI Elec			UL 746B
0.06 In (1.5 Mm)	140 °F	60.0 °C	
0.12 In (3.0 Mm)	140 °F	60.0 °C	
RTI Imp			UL 746B
0.06 In (1.5 Mm)	140 °F	60.0 °C	
0.12 In (3.0 Mm)	140 °F	60.0 °C	
RTI Str			UL 746B
0.06 In (1.5 Mm)	140 °F	60.0 °C	
0.12 In (3.0 Mm)	140 °F	60.0 °C	


# Polyflam RABS 90000 UV5

Acrylonitrile Butadiene Styrene  
 LyondellBasell Industries  
 Engineering Plastics

Electrical	Nominal Value (English)	Nominal Value (SI)	Test Method
Surface Resistivity	> 1.0E+15 ohms	> 1.0E+15 ohms	IEC 60093
Volume Resistivity	> 1.0E+13 ohms·m	> 1.0E+13 ohms·m	IEC 62631-3-1
Comparative Tracking Index	475 V	475 V	IEC 60112
High Amp Arc Ignition (HAI)			UL 746A
0.06 In (1.5 Mm)	PLC 3	PLC 3	
0.12 In (3.0 Mm)	PLC 3	PLC 3	
Hot-wire Ignition (HWI)			UL 746A
0.06 In (1.5 Mm)	PLC 3	PLC 3	
0.12 In (3.0 Mm)	PLC 0	PLC 0	
Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Burning Rate			
0.0787 In (2.00 Mm), Self-extinguishing	0.0 in/min	0.0 mm/min	ISO 3795
0.0787 In (2.00 Mm), Self-extinguishing	0.0 in/min	0.0 mm/min	FMVSS 302
Flame Rating			UL 94 IEC 60695-11-10, -20
0.06 In (1.5 Mm)	V-0	V-0	
0.12 In (3.0 Mm)	V-0	V-0	
Glow Wire Flammability Index			IEC 60695-2-12
0.06 In (1.5 Mm)	1760 °F	960 °C	
0.12 In (3.0 Mm)	1760 °F	960 °C	
Glow Wire Ignition Temperature			IEC 60695-2-13
0.06 In (1.5 Mm)	1340 °F	725 °C	
0.12 In (3.0 Mm)	1340 °F	725 °C	
Oxygen Index	28 %	28 %	ISO 4589-2

# Polyflam RABS 90000 UV5

Acrylonitrile Butadiene Styrene  
LyondellBasell Industries  
Engineering Plastics

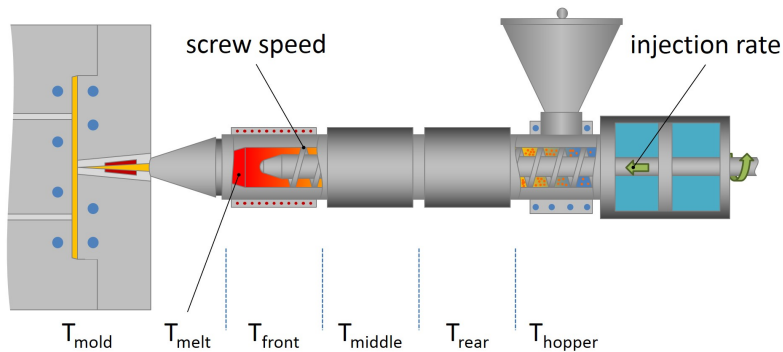

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	158 to 176 °F	70 to 80 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Processing (Melt) Temp	428 to 464 °F	220 to 240 °C
Mold Temperature	104 to 140 °F	40 to 60 °C
Injection Rate	Slow-Moderate	Slow-Moderate
Back Pressure	725 to 1450 psi	5.00 to 10.0 MPa
Screw Speed	< 709 in/min	< 18 m/min

## Injection Notes

Mould surface contacting melt should be of non-corrosive steel (content of chrome > 12%)

## Notes

These are typical property values not to be construed as specification limits.

## Processing Techniques

Specific recommendations for resin type and processing conditions can only be made when the end use, required properties and fabrication equipment are known.

## Product Storage and Handling

- Product should be stored in dry conditions at temperatures below 50°C and protected from UV-light
- Improper storage may bring damage to the packaging and can negatively affects on the quality of this product
- Keep material completely dry for good processing

## Company Information

For further information regarding the LyondellBasell company, please visit <http://www.lyb.com/>.

© LyondellBasell Industries Holdings, B.V. 2022

## Disclaimer

Information in this document is accurate to the best of our knowledge at the date of publication. The document is designed to provide users general information for safe handling, use, processing, storage, transportation, disposal and release and does not constitute any warranty or quality specification, either express or implied, including any warranty of merchantability or fitness for any particular purpose. Users shall determine whether the product is suitable for their use and can be used safely and legally.

In addition to any prohibitions of use specifically noted in this document, LyondellBasell may further prohibit or restrict the sale of its products into certain applications. For further information, please contact a LyondellBasell representative.

## Trademarks

The Trademark referenced within the product name is owned or used by the LyondellBasell family of companies.