

Amodel® AS-1945 HS

polyphthalamide

Amodel® AS-1945 HS is a 45% glass reinforced grade of polyphthalamide (PPA) resin developed specifically for improved performance in a 50/50 ethylene glycol and water environment. This material exceeds the performance required by the automotive industry for polymeric materials exposed to antifreeze at 226°F (108°C), even when tested at 275°F (135°C).

Potential applications include a variety of automotive components such as thermostat housings, heater core endcaps, heater hose connectors, and water inlets, outlets and valves.

- Black: AS-1945 HS BK 324

General

Material Status	• Commercial: Active	
Availability	• Africa & Middle East • Asia Pacific • Europe	• Latin America • North America
Filler / Reinforcement	• Glass Fiber, 45% Filler by Weight	
Additive	• Heat Stabilizer	
Features	• Antifreeze Resistant • Chemical Resistant • Creep Resistant • Good Dimensional Stability • Good Glycol Resistance	• Good Stiffness • Heat Stabilized • High Heat Resistance • High Strength
Uses	• Automotive Applications • Automotive Under the Hood • Housings • Industrial Applications • Industrial Parts	• Machine/Mechanical Parts • Metal Replacement • Power/Other Tools • Thick-walled Parts • Valves/Valve Parts
RoHS Compliance	• RoHS Compliant	
Automotive Specifications	• ASTM D6779 PA121G45 • CHRYSLER MS-DB-478 CPN 5101 Color: BK 324 Black ¹ • FORD WSS-M4D997-A Color: BK-324 Black	• GM GMP.PPA.018 Color: BK-324 Black • GM GMW16360P-PPA-GF45 Color: BK-324 Black • IMDS ID 14880200 Color: BK-324 Black
Appearance	• Black	
Forms	• Pellets	
Processing Method	• Injection Molding	

Physical	Typical Value	Unit	Test method
Density	1.57	g/cm ³	ISO 1183/A
Molding Shrinkage			
Flow ²	0.20	%	ASTM D955
Across Flow ²	0.60	%	ASTM D955
Across Flow	0.60	%	ISO 294-4
Flow	0.20	%	ISO 294-4

Amodel® AS-1945 HS

polyphthalamide

Mechanical	Typical Value	Unit	Test method
Tensile Modulus			
--	15200	MPa	ASTM D638
-- ³	10300	MPa	ASTM D638
--	15100	MPa	ISO 527-2
Tensile Strength			
Break	252	MPa	ASTM D638
Break ³	107	MPa	ASTM D638
Break	244	MPa	ISO 527-2
Tensile Elongation (Break)	2.5	%	ASTM D638
Flexural Modulus			
--	13800	MPa	ASTM D790
--	12600	MPa	ISO 178
Flexural Stress			
--	335	MPa	ISO 178
Yield	359	MPa	ASTM D790
Impact	Typical Value	Unit	Test method
Charpy Notched Impact Strength	13	kJ/m ²	ISO 179/1eA
Notched Izod Impact			
--	120	J/m	ASTM D256
-- ³	69	J/m	ASTM D256
--	11	kJ/m ²	ISO 180/1A
Thermal	Typical Value	Unit	Test method
Deflection Temperature Under Load			ASTM D648
1.8 MPa, Unannealed	282	°C	ISO 75-2/Af
Melting Temperature	312	°C	ISO 11357-3
Injection	Typical Value	Unit	
Drying Temperature	121	°C	
Drying Time	4.0	hr	
Suggested Max Moisture	0.030 to 0.060	%	
Hopper Temperature	79	°C	
Rear Temperature	304 to 318	°C	
Front Temperature	316 to 329	°C	
Processing (Melt) Temp	321 to 343	°C	
Mold Temperature	135	°C	

Amodel® AS-1945 HS

polyphthalamide

Injection Notes


Storage:


- Amodel® compounds are shipped in moisture-resistant packages at moisture levels according to specifications. Sealed, undamaged bags should be preferably stored in a dry room at a maximum temperature of 50°C (122°F) and should be protected from possible damage. If only a portion of a package is used, the remaining material should be transferred into a sealable container. It is recommended that Amodel® resins be dried prior to molding following the recommendations found in this datasheet and/or in the Amodel® processing guide.
-

Amodel® AS-1945 HS

polyphthalamide

Isothermal Stress vs. Strain (ISO 11403-1)

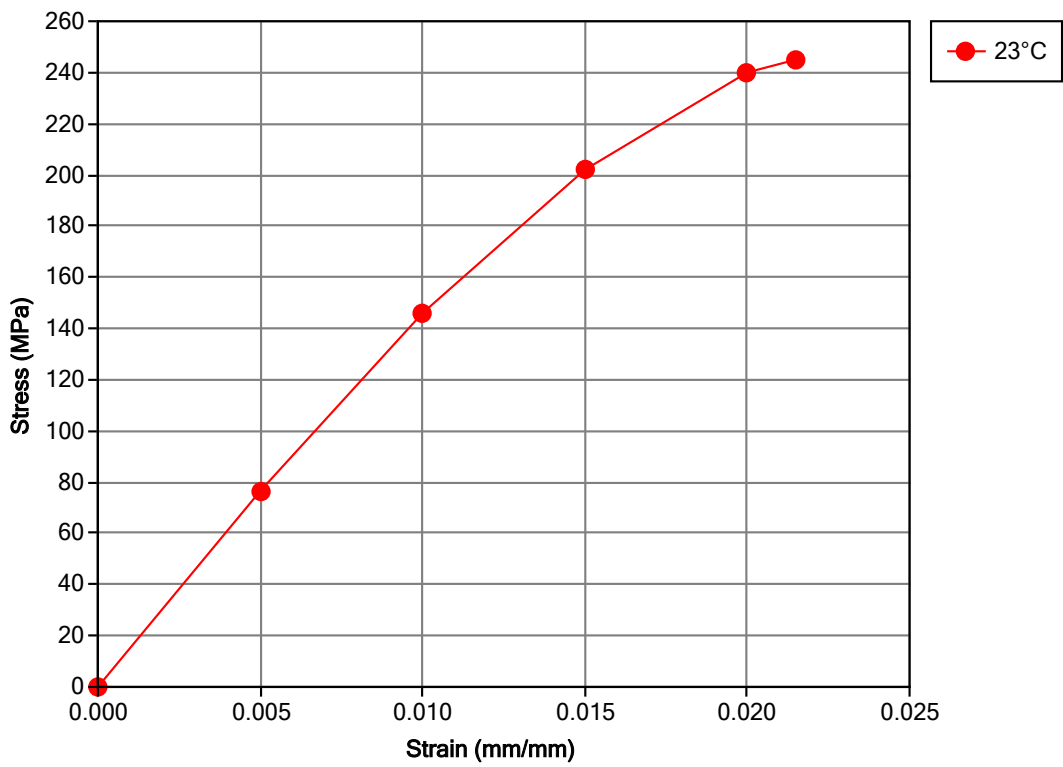

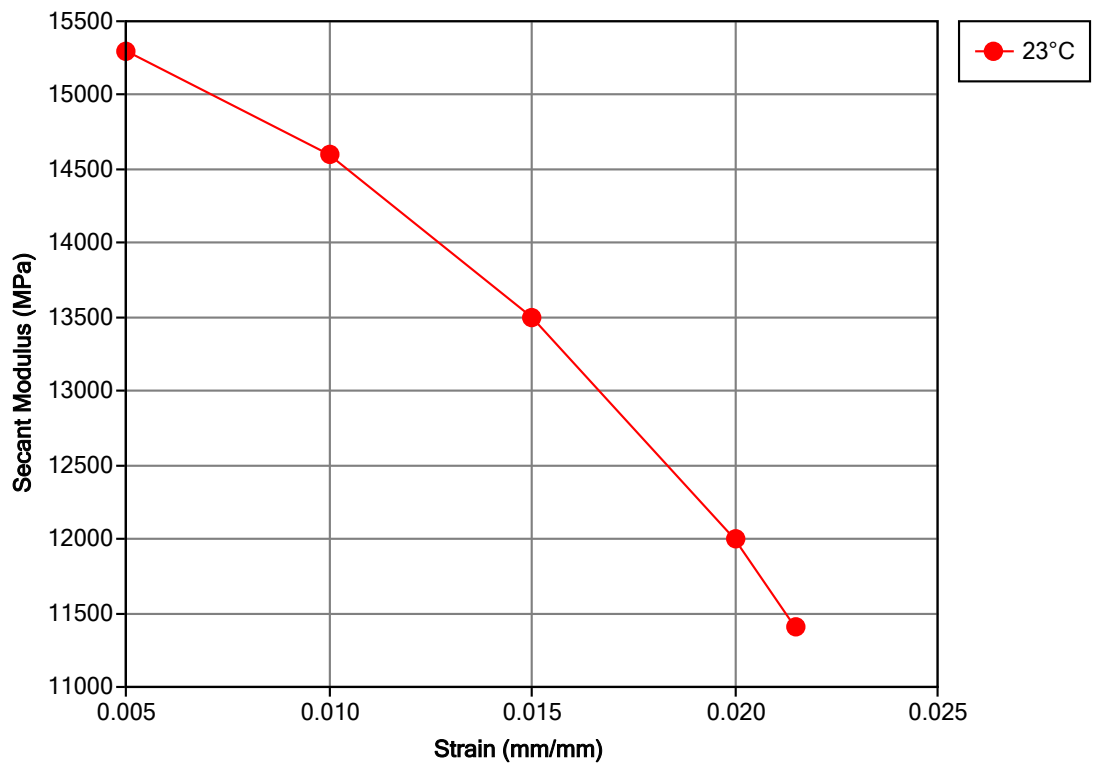

Amodel® AS-1945 HS

polyphthalamide

Notes

Typical properties: these are not to be construed as specifications.

¹ CPN 5101

² Type D2

³ After Immersion in 50/50 Glycol/Water Mixture for 1,000 hours at 275°F (135°C)

www.solvay.com

SpecialtyPolymers.EMEA@solvay.com | Europe, Middle East and Africa

SpecialtyPolymers.Americas@solvay.com | Americas

SpecialtyPolymers.Asia@solvay.com | Asia and Australia

Safety Data Sheets (SDS) are available by emailing us or contacting your sales representative. Always consult the appropriate SDS before using any of our products.

Neither Solvay Specialty Polymers nor any of its affiliates makes any warranty, express or implied, including merchantability or fitness for use, or accepts any liability in connection with this product, related information or its use. Some applications of which Solvay's products may be proposed to be used are regulated or restricted by applicable laws and regulations or by national or international standards and in some cases by Solvay's recommendation, including applications of food/feed, water treatment, medical, pharmaceuticals, and personal care. Only products designated as part of the Solviva® family of biomaterials may be considered as candidates for use in implantable medical devices. The user alone must finally determine suitability of any information or products for any contemplated use in compliance with applicable law, the manner of use and whether any patents are infringed. The information and the products are for use by technically skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other substance or any other process. This is not a license under any patent or other proprietary right.

All trademarks and registered trademarks are property of the companies that comprise the Solvay Group or their respective owners.

© 2020 Solvay Specialty Polymers. All rights reserved.

