

NORYL™ Resin GFN3 [SI](#)| [British](#)| [Metric](#)| [PDF](#)Europe-Africa-Middle East: **COMMERCIAL**

NORYL GFN3 is a standard 30 % glass filled material with a HDT/A of 145C according to ISO 75

**Property**


| <b>TYPICAL PROPERTIES (1)</b>                 |              |                         |                 |
|---|--------------|-------------------------|-----------------|
| <b>MECHANICAL</b>                             | <b>Value</b> | <b>Unit</b>             | <b>Standard</b> |
| Taber Abrasion, CS-17, 1 kg                   | 70           | mg/1000cy               | SABIC Method    |
| Tensile Stress, break, 5 mm/min               | 100          | MPa                     | ISO 527         |
| Tensile Strain, break, 5 mm/min               | 1.5          | %                       | ISO 527         |
| Tensile Modulus, 1 mm/min                     | 8000         | MPa                     | ISO 527         |
| Flexural Stress, break, 2 mm/min              | 125          | MPa                     | ISO 178         |
| Flexural Modulus, 2 mm/min                    | 6000         | MPa                     | ISO 178         |
| Hardness, H358/30                             | 130          | MPa                     | ISO 2039-1      |
| <b>IMPACT</b>                                 | <b>Value</b> | <b>Unit</b>             | <b>Standard</b> |
| Izod Impact, unnotched 80*10*4 +23°C          | 25           | kJ/m <sup>2</sup>       | ISO 180/1U      |
| Izod Impact, unnotched 80*10*4 -30°C          | 25           | kJ/m <sup>2</sup>       | ISO 180/1U      |
| Charpy 23°C, Unnotch Edgew 80*10*4 sp=62mm    | 25           | kJ/m <sup>2</sup>       | ISO 179/1eU     |
| Charpy -30°C, Unnotch Edgew 80*10*4 sp=62mm   | 25           | kJ/m <sup>2</sup>       | ISO 179/1eU     |
| <b>THERMAL</b>                                | <b>Value</b> | <b>Unit</b>             | <b>Standard</b> |
| Thermal Conductivity                          | 0.28         | W/m·°C                  | ISO 8302        |
| CTE, 23°C to 80°C, flow                       | 3.E-05       | 1/°C                    | ISO 11359-2     |
| CTE, 23°C to 80°C, xflow                      | 7.E-05       | 1/°C                    | ISO 11359-2     |
| Ball Pressure Test, 125°C +/- 2°C             | PASSES       | -                       | IEC 60695-10-2  |
| Ball Pressure Test, approximate maximum       | 125          | °C                      | IEC 60695-10-2  |
| Vicat Softening Temp, Rate A/50               | 155          | °C                      | ISO 306         |
| Vicat Softening Temp, Rate B/50               | 145          | °C                      | ISO 306         |
| Vicat Softening Temp, Rate B/120              | 155          | °C                      | ISO 306         |
| HDT/Be, 0.45MPa Edgew 120*10*4 sp=100mm       | 145          | °C                      | ISO 75/Be       |
| HDT/Ae, 1.8 MPa Edgew 120*10*4 sp=100mm       | 140          | °C                      | ISO 75/Ae       |
| Relative Temp Index, Elec                     | 50           | °C                      | UL 746B         |
| Relative Temp Index, Mech w/impact            | 50           | °C                      | UL 746B         |
| Relative Temp Index, Mech w/o impact          | 50           | °C                      | UL 746B         |
| <b>PHYSICAL</b>                               | <b>Value</b> | <b>Unit</b>             | <b>Standard</b> |
| Mold Shrinkage on Tensile Bar, flow (2) (5)   | 0.1 - 0.3    | %                       | SABIC Method    |
| Density                                       | 1.3          | g/cm <sup>3</sup>       | ISO 1183        |
| Water Absorption, (23°C/sat)                  | 0.2          | %                       | ISO 62          |
| Moisture Absorption (23°C / 50% RH)           | 0.06         | %                       | ISO 62          |
| Melt Volume Rate, MVR at 280°C/10.0 kg        | 7            | cm <sup>3</sup> /10 min | ISO 1133        |
| <b>ELECTRICAL</b>                             | <b>Value</b> | <b>Unit</b>             | <b>Standard</b> |
| Volume Resistivity                            | 1.E+15       | Ohm-cm                  | IEC 60093       |
| Surface Resistivity, ROA                      | >1.E+15      | Ohm                     | IEC 60093       |
| Dielectric Strength, in oil, 3.2 mm           | 18           | kV/mm                   | IEC 60243-1     |
| Relative Permittivity, 1 MHz                  | 2.9          | -                       | IEC 60250       |
| Dissipation Factor, 50/60 Hz                  | 0            | -                       | IEC 60250       |
| Dissipation Factor, 1 MHz                     | 0.001        | -                       | IEC 60250       |
| Comparative Tracking Index                    | 250          | V                       | IEC 60112       |
| Relative Permittivity, 50/60 Hz               | 2.9          | -                       | IEC 60250       |
| <b>FLAME CHARACTERISTICS</b>                  | <b>Value</b> | <b>Unit</b>             | <b>Standard</b> |
| UL Recognized, 94HB Flame Class Rating (3)    | 1.5          | mm                      | UL 94           |
| Glow Wire Flammability Index 850°C, passes at | 3.2          | mm                      | IEC 60695-2-12  |
| Oxygen Index (LOI)                            | 26           | %                       | ISO 4589        |

Source GMD, last updated:1998/06/05

**Processing**

| <b>Parameter</b>            | <b>Value</b> | <b>Unit</b> |
|-----------------------------|--------------|-------------|
| <b>Injection Molding</b>    |              |             |
| Drying Temperature          | 100 - 120    | °C          |
| Drying Time                 | 2 - 4        | hrs         |
| Maximum Moisture Content    | 0.02         | %           |
| Melt Temperature            | 280 - 300    | °C          |
| Nozzle Temperature          | 280 - 300    | °C          |
| Front - Zone 3 Temperature  | 290 - 310    | °C          |
| Middle - Zone 2 Temperature | 270 - 290    | °C          |
| Rear - Zone 1 Temperature   | 250 - 270    | °C          |
| Hopper Temperature          | 60 - 80      | °C          |
| Mold Temperature            | 80 - 120     | °C          |

Source GMD, last updated:1998/06/05

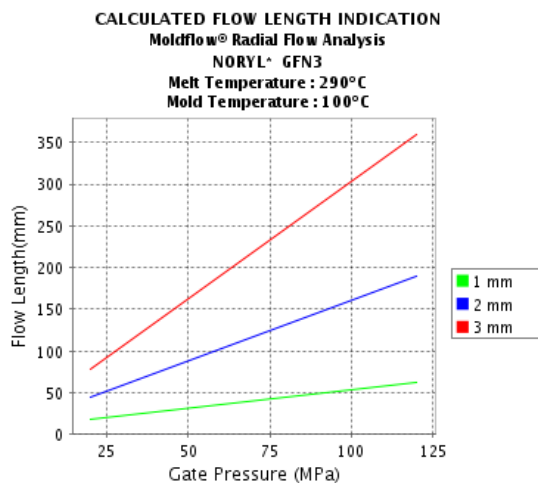

**Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.**  
 ® Moldflow is a registered trademark of the Moldflow Corporation.

THESE PROPERTY VALUES ARE NOT INTENDED FOR SPECIFICATION PURPOSES.

PLEASE [CONTACT US](#) FOR AVAILABILITY IN YOUR REGION.

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

(6) Needs hard coat to consistently pass 60 sec Vertical Burn.

**Disclaimer:** THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES (SELLER) ARE SOLD SUBJECT TO SELLERS STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLERS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLERS STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT. Each user is responsible for making its own determination as to the suitability of Sellers materials, products, services or recommendations for the users particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Sellers Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC and brands marked with ™ are trademarks of SABIC or its subsidiaries or affiliates.

© 2014 Saudi Basic Industries Corporation (SABIC). All Rights Reserved.