

CAMPUS® foglio dati

HOSTAFORM® S 27072 WS 10/1570 - POM
Celanese




Proprietà Reologiche	Valore	Unità	Norma del test
Indice di fusione di volume, MVR	21	cm ³ /10min	ISO 1133
Temperatura	190	°C	ISO 1133
Carico	2.16	kg	ISO 1133
Ritiro di stampaggio, parallelo	1.8	%	ISO 294-4, 2577
Ritiro di stampaggio, perpendicolare	1.9	%	ISO 294-4, 2577
Proprietà Meccaniche	Valore	Unità	Norma del test
Modulo a trazione	2000	MPa	ISO 527-1/-2
Carico unitario a trazione	46	MPa	ISO 527-1/-2
Deformazione a snervamento	8	%	ISO 527-1/-2
Deformazione nominale a rottura	35	%	ISO 527-1/-2
Resistenza all'urto Charpy, +23°C	150P	kJ/m ²	ISO 179/1eU
Resistenza all'urto Charpy, -30°C	110	kJ/m ²	ISO 179/1eU
Resist. urto Charpy con intaglio, +23°C	11	kJ/m ²	ISO 179/1eA
Resist. urto Charpy con intaglio, -30°C	8	kJ/m ²	ISO 179/1eA
Proprietà Termiche	Valore	Unità	Norma del test
Temperatura di fusione, 10°C/min	166	°C	ISO 11357-1/-3
Temp.di inflessione sotto carico, 1.80 MPa	84	°C	ISO 75-1/-2
Temp.di rammollimento Vicat, 50°C/h 50N	135	°C	ISO 306
Coeff.di dilatazione termica lin., parallelo	120	E-6/K	ISO 11359-1/-2
Altre Proprietà	Valore	Unità	Norma del test
Assorbimento d'acqua	0.7	%	Sim. alla ISO 62
Assorbimento d'umidità	0.2	%	Sim. alla ISO 62
Massa volumica	1390	kg/m ³	ISO 1183


HOSTAFORM® S 27072 WS 10/1570 - POM Celanese

Funzioni

Sforzi-deformazione

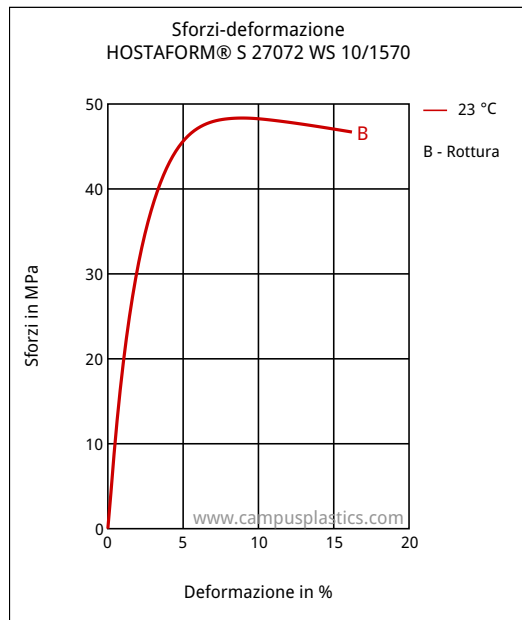

Modulo secante-deformazione

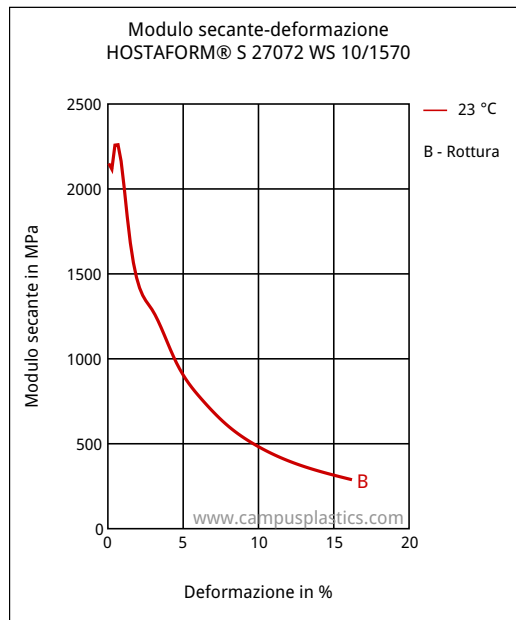

Caratteristiche

Processabilità e Forma di Forni

Stampaggio ad Iniezione

Forma fisica disponibile

Pellet

Additivi

Agente di distacco

Caratteristiche speciali

Stabilizzato o stabile alla luce, Stab. agli U.V. o per applicaz.in esterni

NOTICE TO USERS: Values shown are based on testing of laboratory test specimens and represent data that fall within the standard range of properties for natural material. These values alone do not represent a sufficient basis for any part design and are not intended for use in establishing maximum, minimum, or ranges of values for specification purposes. Colorants or other additives may cause significant variations in data values. Properties of molded parts can be influenced by a wide variety of factors including, but not limited to, material selection, additives, part design, processing conditions and environmental exposure. Any determination of the suitability of a particular material and part design for any use contemplated by the users and the manner of such use is the sole responsibility of the users, who must assure themselves that the material as subsequently processed meets the needs of their particular product or use. To the best of our knowledge, the information contained in this publication is accurate; however, we do not assume any liability whatsoever for the accuracy and completeness of such information. The information contained in this publication should not be construed as a promise or guarantee of specific properties of our products. It is the sole responsibility of the users to investigate whether any existing patents are infringed by the use of the materials mentioned in this publication. Moreover, there is a need to reduce human exposure to many materials to the lowest practical limits in view of possible adverse effects. To the extent that any hazards may have been mentioned in this publication, we neither suggest nor guarantee that such hazards are the only ones that exist. We recommend that persons intending to rely on any recommendation or to use any equipment, processing technique or material mentioned in this publication should satisfy themselves that they can meet all applicable safety and health standards. We strongly recommend that users seek and adhere to the manufacturer's current instructions for handling each material they use, and entrust the handling of such material to adequately trained personnel only. Please call the telephone numbers listed for additional technical information. Call Customer Services for the appropriate Materials Safety Data Sheets (MSDS) before attempting to process our products. The products mentioned herein are not intended for use in medical or dental implants.