

RILSAN® BESVO A FDA

PA11,E,22-010

Rilsan® BESVO A FDA resin is a polyamide 11 produced from a renewable source. This natural grade, dedicated to extrusion, contains a negligible amount of oligomers and is specially designed for food contact applications.

The percentage of renewable carbon according to ASTM D 6866 (calculated) is **100%**.

MAIN CHARACTERISTICS

PROPERTIES	DRY / COND	UNIT	TEST STANDARD
RHEOLOGICAL PROPERTIES			
Melt Volume-Flow Rate	6 / *	cm ³ /10min	ISO 1133
Temperature	235 / *	°C	-
Load	10 / *	kg	-
MECHANICAL PROPERTIES			
Tensile Modulus	- / 1180	MPa	ISO 527-1/-2
Yield stress	- / 36	MPa	ISO 527-1/-2
Yield strain	- / 5	%	ISO 527-1/-2
Nominal Strain at Break	- / >50	%	ISO 527-1/-2
Shore D Hardness, 15s	71 / *	-	ISO 7619-1
Charpy Impact Strength, +23°C	- / No Break	kJ/m ²	ISO 179/1eU
Charpy Impact Strength, -30°C	- / No Break	kJ/m ²	ISO 179/1eU
Charpy Notched Impact Strength, +23°C	- / 15	kJ/m ²	ISO 179/1eA
Charpy Notched Impact Strength, -30°C	- / 13	kJ/m ²	ISO 179/1eA
THERMAL PROPERTIES			
Melting Temperature, 10°C/min	186 / *	°C	ISO 11357-1/-3
ELECTRICAL PROPERTIES			
Dielectric (Electric) Strength	- / 30	kV/mm	IEC 60243-1
OTHER PROPERTIES			
Water Absorption	1.9 / *	%	Sim. to ISO 62
Density	1030 / 1030	kg/m ³	ISO 1183
%Bio-Based	100	-	ASTM D6866

MAIN APPLICATIONS:

- Food and beverage tubing
- Forensic evidence bags

PACKAGING:

This grade is delivered dried in sealed packaging (25 kg bags) ready to be processed.

SHELF LIFE:


Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

RILSAN® BESVO A FDA


Two years from the delivery. For any use above this limit, please refer to our technical services.

DIAGRAMS


VISCOSITY-SHEAR RATE

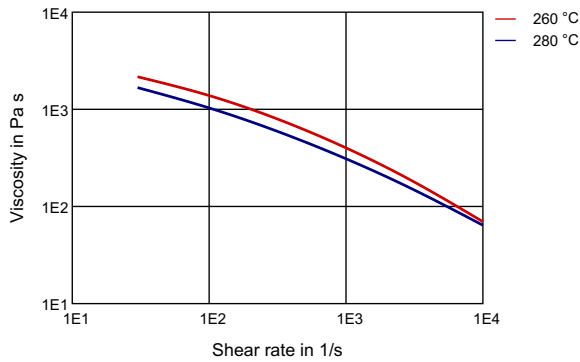


SHEARSTRESS-SHEAR RATE

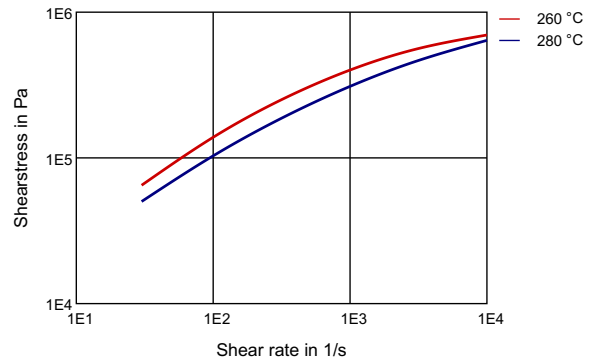

STRESS-STRAIN

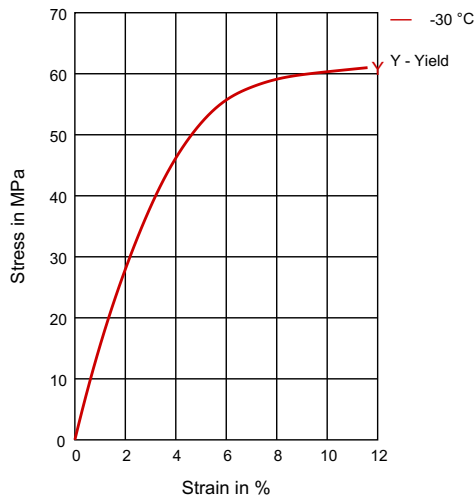

SECANT MODULUS-STRAIN

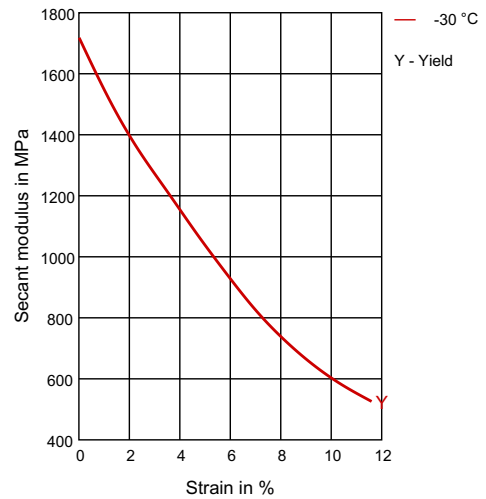

Processing conditions:

- Typical melt temperature (Min / Recommended / Max) : 230°C / 250°C / 280°C.
- Drying time and temperature (only necessary for bags opened for more than two hours) : 4-6 hours at 65-80°C.

PROCESSING

Injection Molding, Film Extrusion, Profile Extrusion, Other

SPECIAL CHARACTERISTICS

Bio-Based, Food Contact Approval

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

RILSAN® BESVO A FDA

Extrusion

DELIVERY FORM

Pellets

REGIONAL AVAILABILITY

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

Rilsan® is a registered trademark of Arkema
© 2022 Arkema Inc. All rights reserved.

[rilsan.com](https://www.rilsan.com)

Arkema Inc. – Technical Polymers

900 First Avenue
King of Prussia, PA 19406
Tel.: +1 610 205 7000
Fax: +1 610 205 7497
[arkema-america.com](https://www.arkema-america.com)

RILSAN®
BY ARKEMA

Headquarters: Arkema France

420, rue d'Estienne d'Orves
92705 Colombes Cedex – France
Tel.: +33 1 49 00 80 80
Fax: +33 1 49 00 83 96
[arkema.com](https://www.arkema.com)