

Ixef® 1022

polyarylamide

Ixef® 1022 is a 50% glass-fiber reinforced, general purpose polyarylamide compound that exhibits very high strength and rigidity, outstanding surface gloss, and excellent creep resistance.

General

Material Status	• Commercial: Active		
Availability	• Africa & Middle East • Asia Pacific	• Europe • Latin America	• North America
Filler / Reinforcement	• Glass Fiber, 50% Filler by Weight		
Features	• General Purpose • Good Chemical Resistance • Good Creep Resistance • Good Dimensional Stability	• Good Sterilizability • High Flow • High Strength • Low Moisture Absorption	• Outstanding Surface Finish • Ultra High Stiffness
Uses	• Appliances • Automotive Applications • Automotive Interior Parts • Cell Phones	• Electrical Parts • Furniture • High Gloss Applications • Hospital Goods	• Medical Devices • Sporting Goods • Surgical Instruments
RoHS Compliance	• RoHS Compliant		
Automotive Specifications	• ASTM D6779 PA111G50 • BMW GS 93016 • BOSCH N28 BN05-OX1 Color: 0008 Natural • BOSCH N28 BN05-OX1 Color: 9008 Black • GM GM7001M PAMXD6(A4,A22,A64,BA651,G30,MS1700,NS335) Color: 9008 Black • GM GM7001M PAMXD6(A4,A22,A64,BA751,G30,MS1700,NS350) Color: NT Natural		
UL File NumberGlobal	• E95746		
Appearance	• Black	• Colors Available	• Natural Color
Forms	• Pellets		
Processing Method	• Injection Molding		

Physical	Dry	Conditioned Unit	Test method
Density	1.64	-- g/cm ³	ISO 1183
Molding Shrinkage	0.10 to 0.30	-- %	ISO 294-4
Water Absorption (73°F, 24 hr)	0.16	-- %	ISO 62
Moisture Absorption - Equil, 65% RH	1.50	--	Internal Method

Mechanical	Dry	Conditioned Unit	Test method
Tensile Modulus	2.90E+6	2.90E+6 psi	ISO 527-2
Tensile Stress (Break)	40600	37700 psi	ISO 527-2
Tensile Strain (Break)	1.9	2.2 %	ISO 527-2
Flexural Modulus	2.76E+6	-- psi	ISO 178
Flexural Stress	58000	-- psi	ISO 178

Ixef® 1022

polyarylamide

Impact	Dry	Conditioned	Unit	Test method
Notched Izod Impact	2.1	--	ft·lb/in	ASTM D256
Unnotched Izod Impact	16	--	ft·lb/in	ASTM D256

Thermal	Dry	Conditioned	Unit	Test method
Heat Deflection Temperature 264 psi, Unannealed	446	--	°F	ISO 75-2/A
CLTE - Flow	8.3E-6	--	in/in/°F	ISO 11359-2

Electrical	Dry	Conditioned	Unit	Test method
Volume Resistivity	1.0E+13	--	ohms·cm	IEC 60093
Electric Strength	790	--	V/mil	IEC 60243-1
Dielectric Constant (110 Hz)	4.60	--		IEC 60250
Comparative Tracking Index	570	--	V	IEC 60112
Dissipation Factor	0.017	--		IEC 60250

Flammability	Dry	Conditioned	Unit	Test method
Flame Rating ¹	HB	--		UL 94
Oxygen Index	25	--	%	ISO 4589-2

Injection	Dry Unit
Drying Temperature	248 °F
Drying Time	0.50 to 1.5 hr
Rear Temperature	482 to 500 °F
Front Temperature	500 to 554 °F
Nozzle Temperature	500 to 554 °F
Processing (Melt) Temp	536 °F
Mold Temperature	248 to 284 °F
Injection Rate	Fast

Injection Notes

Hot runners: 250°C to 260°C (482°C to 500°F)

Storage

Ixef® compounds are shipped in moisture-resistant packages at moisture levels according to specifications. Sealed, undamaged bags should be preferably stored in a dry room at a maximum temperature of 50°C (122°F) and should be protected from possible damage. If only a portion of a package is used, the remaining material should be transferred into a sealable container. It is recommended that Ixef® resins be dried prior to molding following the recommendations found in this datasheet and/or in the Ixef® processing guide.

Drying

The material as supplied is ready for molding without drying. However, If the bags have been open for longer than 24 hours, the material needs to be dried. When using a desiccant air dryer with dew point of -28°C (-18°F) or lower, these guidelines can be followed: 0.5-1.5 hour at 120°C (248°F), 1-3 hours at 100°C (212°F), or 1-7 hours at 80°C (176°F).


Injection Molding

Ixef 1022 compound can be readily injection molded in most screw injection molding machines. A general purpose screw is recommended, with minimum back pressure.


The measured melt temperature should be about 280°C (536°F), and the barrel temperatures should be around 250 to 260°C (482 to 500°F) in the rear zone, gradually increasing to 260 to 290°C (500 to 554°F) in the front zone. If hot runners are used, they should be set to 250 to 260°C (482 to 500°F).

To maximize crystallinity, the temperature of the mold cavity surface must be held between 120 and 140°C (248 and 284°F). Molding at lower temperatures will produce articles that may warp, have poor surface appearance, and have a greater tendency to creep. Set injection pressure to give rapid injection. Adjust holding pressure and hold time to maximize part weight. Transfer from injection to hold pressure at the screw position just before the part is completely filled (95-99%).


Isothermal Stress vs. Strain (ISO 11403-1)

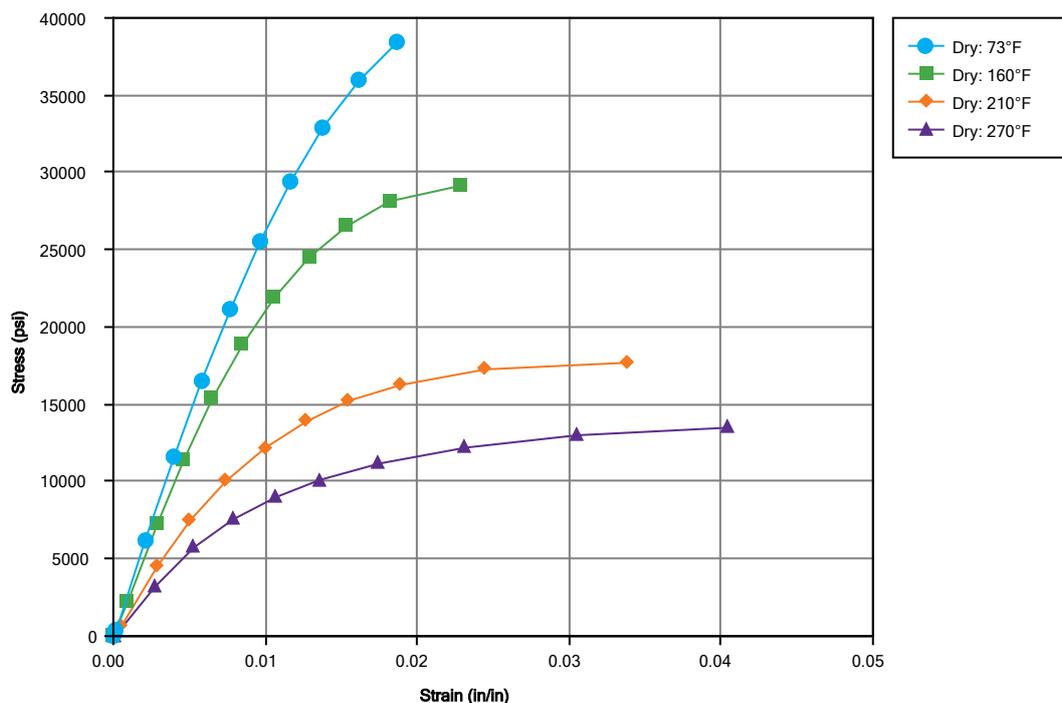

Secant Modulus vs. Strain (ISO 11403-1)

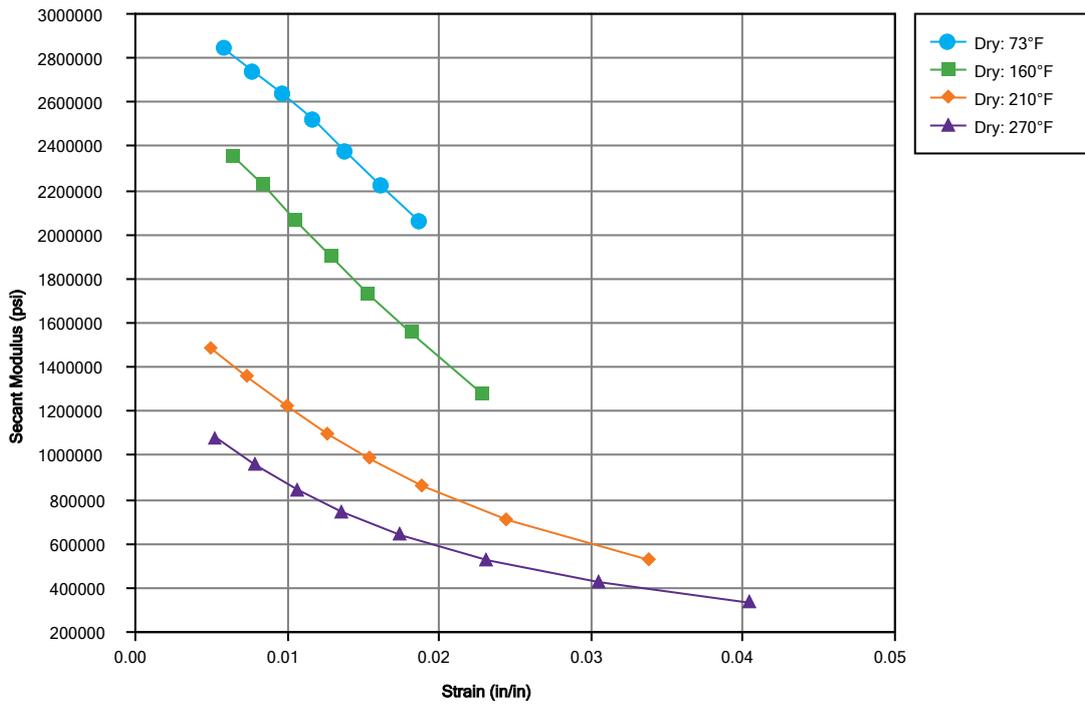

Viscosity vs. Shear Rate (ISO 11403-2)

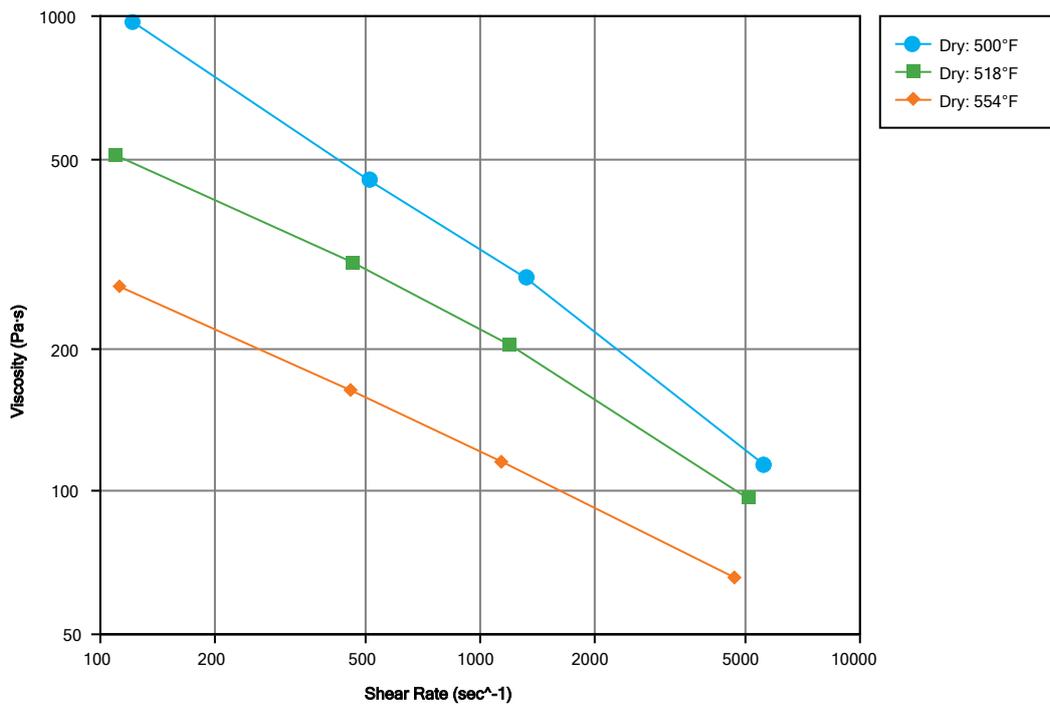

Ixef® 1022

polyarylamide

Notes

Typical properties: these are not to be construed as specifications.

¹ These flammability ratings are not intended to reflect hazards presented by these or any other materials under actual fire conditions.

www.solvay.com

SpecialtyPolymers.EMEA@solvay.com | Europe, Middle East and Africa

SpecialtyPolymers.Americas@solvay.com | Americas

SpecialtyPolymers.Asia@solvay.com | Asia and Australia

Safety Data Sheets (SDS) are available by emailing us or contacting your sales representative. Always consult the appropriate SDS before using any of our products.

Neither Solvay Specialty Polymers nor any of its affiliates makes any warranty, express or implied, including merchantability or fitness for use, or accepts any liability in connection with this product, related information or its use. Some applications of which Solvay's products may be proposed to be used are regulated or restricted by applicable laws and regulations or by national or international standards and in some cases by Solvay's recommendation, including applications of food/feed, water treatment, medical, pharmaceuticals, and personal care. Only products designated as part of the Solviva® family of biomaterials may be considered as candidates for use in implantable medical devices. The user alone must finally determine suitability of any information or products for any contemplated use in compliance with applicable law, the manner of use and whether any patents are infringed. The information and the products are for use by technically skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other substance or any other process. This is not a license under any patent or other proprietary right.

All trademarks and registered trademarks are property of the companies that comprise the Solvay Group or their respective owners.

© 2015 Solvay Specialty Polymers. All rights reserved.

